


Fixed stairs without platform Stair inclination 45° 2211

- Step width optionally 600, 800 or 1,000 mm.
- As standard with a handrail, may optionally be mounted on the left or the right, 2. Handrail at extra cost.
- Aluminium profile steps 250 mm deep, alternative steel or aluminium grid steps 270 mm deep at additional cost on request.
- Standard design with 2 wall mounting brackets at top and floor brackets at bottom, on request at top with suspension hook or mounting bracket at additional cost.
- Outer step width including single handrail = step width + 100 mm, or step width + 150 mm with double handrail.
- Intermediate sizes at price of next highest number of steps.
- Total load-bearing capacity 300 kg, step load 150 kg.
- Shipped in subassemblies pre-assembled in the factory.

Note: according to DIN 1055 and DIN 18065, these stairs are not permitted in residential buildings.

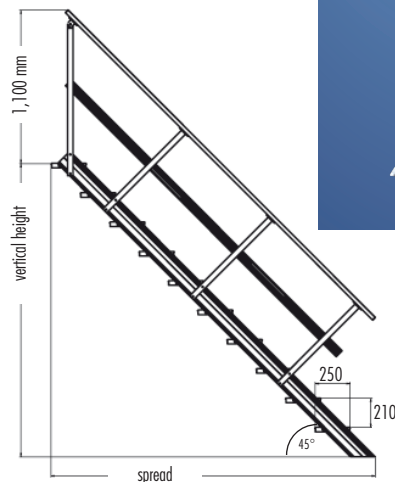

Step width 600 mm

G

Number of steps		4	5	6	7	8	9	10	11
Vert. height	approx. m	0.84	1.05	1.26	1.47	1.68	1.89	2.10	2.31
Spread	approx. m	1.07	1.28	1.49	1.70	1.91	2.12	2.33	2.54
Weight	approx. kg	19.0	23.0	26.0	29.0	33.0	37.0	40.0	44.0
Order no.		22110604	22110605	22110606	22110607	22110608	22110609	22110610	22110611

Number of steps		12	13	14	15	16	17	18	19
Vert. height	approx. m	2.52	2.73	2.94	3.15	3.36	3.57	3.78	3.99
Spread	approx. m	2.75	2.96	3.17	3.38	3.59	3.80	4.01	4.22
Weight	approx. kg	47.0	51.0	54.0	57.0	61.0	64.0	68.0	72.0
Order no.		22110612	22110613	22110614	22110615	22110616	22110617	22110618	22110619

Step width 800 mm

G

Number of steps		4	5	6	7	8	9	10	11
Vert. height	approx. m	0.84	1.05	1.26	1.47	1.68	1.89	2.10	2.31
Spread	approx. m	1.07	1.28	1.49	1.70	1.91	2.12	2.33	2.54
Weight	approx. kg	21.0	26.0	29.0	33.0	37.0	42.0	45.0	50.0
Order no.		22110804	22110805	22110806	22110807	22110808	22110809	22110810	22110811

Number of steps		12	13	14	15	16	17	18	19
Vert. height	approx. m	2.52	2.73	2.94	3.15	3.36	3.57	3.78	3.99
Spread	approx. m	2.75	2.96	3.17	3.38	3.59	3.80	4.01	4.22
Weight	approx. kg	53.0	58.0	61.0	65.0	69.0	73.0	77.0	82.0
Order no.		22110812	22110813	22110814	22110815	22110816	22110817	22110818	22110819

Step width 1,000 mm

G

Number of steps		4	5	6	7	8	9	10	11
Vert. height	approx. m	0.84	1.05	1.26	1.47	1.68	1.89	2.10	2.31
Spread	approx. m	1.07	1.28	1.49	1.70	1.91	2.12	2.33	2.54
Weight	approx. kg	23.0	28.0	32.0	36.0	41.0	46.0	50.0	55.0
Order no.		22111004	22111005	22111006	22111007	22111008	22111009	22111010	22111011

Number of steps		12	13	14	15	16	17	18	19
Vert. height	approx. m	2.52	2.73	2.94	3.15	3.36	3.57	3.78	3.99
Spread	approx. m	2.75	2.96	3.17	3.38	3.59	3.80	4.01	4.22
Weight	approx. kg	59.0	64.0	68.0	72.0	77.0	81.0	86.0	91.0
Order no.		22111012	22111013	22111014	22111015	22111016	22111017	22111018	22111019

Aluminium or steel grating steps on request.




Accessories can be found on page 160.

Fixed stairs without platform Stair inclination 60° 2210

- Step width optionally 600, 800 or 1,000 mm.
- As standard with a handrail, may optionally be mounted on the left or the right, 2. Handrail at extra cost.
- Aluminium profile steps 200 mm deep, alternative steel or aluminium grid steps 240 mm deep at additional cost on request.
- Standard design with 2 wall mounting brackets at top and floor brackets at bottom, on request at top with suspension hook or mounting bracket at additional cost.
- Outer step width including single handrail = step width + 100 mm, or step width + 150 mm with double handrail.
- Intermediate sizes at price of next highest number of steps.
- Total load-bearing capacity 300 kg, step load 150 kg.
- Shipped in subassemblies pre-assembled in the factory.

Note: according to DIN 1055 and DIN 18065, these stairs are not permitted in residential buildings.

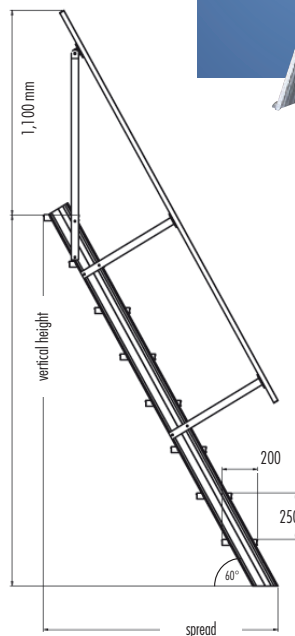

Step width 600 mm

G

Number of steps		4	5	6	7	8	9	10	11
Vert. height	approx. m	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75
Spread	approx. m	0.76	0.91	1.06	1.20	1.35	1.49	1.64	1.78
Weight	approx. kg	13.0	16.0	19.0	22.0	25.0	28.0	31.0	34.0
Order no.		22100604	22100605	22100606	22100607	22100608	22100609	22100610	22100611

Number of steps		12	13	14	15	16	17	18	19	20
Vert. height	approx. m	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00
Spread	approx. m	1.93	2.07	2.22	2.36	2.51	2.65	2.80	2.95	3.09
Weight	approx. kg	36.0	39.0	43.0	46.0	48.0	51.0	54.0	57.0	60.0
Order no.		22100612	22100613	22100614	22100615	22100616	22100617	22100618	22100619	22100620

Step width 800 mm

G

Number of steps		4	5	6	7	8	9	10	11
Vert. height	approx. m	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75
Spread	approx. m	0.76	0.91	1.06	1.20	1.35	1.49	1.64	1.78
Weight	approx. kg	15.0	19.0	22.0	25.0	29.0	32.0	36.0	39.0
Order no.		22100804	22100805	22100806	22100807	22100808	22100809	22100810	22100811

Number of steps		12	13	14	15	16	17	18	19	20
Vert. height	approx. m	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00
Spread	approx. m	1.93	2.07	2.22	2.36	2.51	2.65	2.80	2.95	3.09
Weight	approx. kg	42.0	45.0	49.0	53.0	55.0	59.0	62.0	66.0	69.0
Order no.		22100812	22100813	22100814	22100815	22100816	22100817	22100818	22100819	22100820


Step width 1,000 mm

G

Number of steps		4	5	6	7	8	9	10	11
Vert. height	approx. m	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75
Spread	approx. m	0.76	0.91	1.06	1.20	1.35	1.49	1.64	1.78
Weight	approx. kg	17.0	21.0	25.0	28.0	32.0	36.0	40.0	44.0
Order no.		22101004	22101005	22101006	22101007	22101008	22101009	22101010	22101011

Number of steps		12	13	14	15	16	17	18	19	20
Vert. height	approx. m	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00
Spread	approx. m	1.93	2.07	2.22	2.36	2.51	2.65	2.80	2.95	3.09
Weight	approx. kg	47.0	51.0	55.0	59.0	62.0	66.0	70.0	74.0	77.0
Order no.		22101012	22101013	22101014	22101015	22101016	22101017	22101018	22101019	22101020

Aluminium or steel grating steps on request.

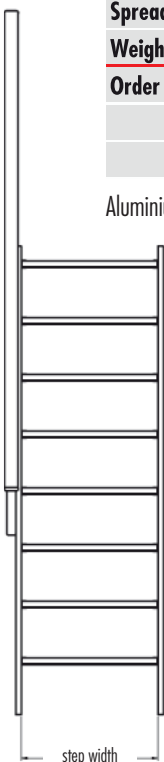


Accessories can be found on page 160.

Fixed stairs with platform Stair inclination 45° 2221

- Step width optionally 600, 800 or 1,000 mm.
- As standard with a handrail, may optionally be mounted on the left or the right, 2. Handrail at extra cost.
- 1,100 mm high guardrail on the platform, with knee bar and toeboard.
- Platform length 500 mm. Extension at intervals of 500 mm for aluminium profile steps and for grid platforms. Where aluminium chequer plate is used (step plate) intermediate sizes are possible. Platform lengths are limited to 2,500 mm in cantilever version.
- Aluminium profile steps 250 mm deep, alternative steel or aluminium grid steps 270 mm deep at additional cost on request.
- Standard design with 2 wall mounting brackets at top and floor brackets at bottom, on request at top with suspension hook or mounting bracket at additional cost.
- Triangular brackets must be used for side wall mounting (see accessories page 160), platform exit optionally on the left or on the right.
- Outer step width including single handrail = step width + 100 mm, or step width + 150 mm with double handrail.
- Intermediate sizes at price of next highest number of steps.
- Total load-bearing capacity 300 kg, step load 150 kg.
- Shipped in subassemblies pre-assembled in the factory.

Note: according to DIN 1055 and DIN 18065, these stairs are not permitted in residential buildings.

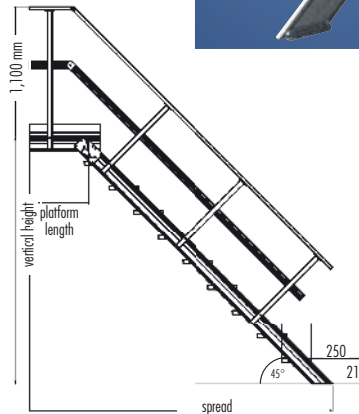

2221

Step width 600 mm

Number of steps		4	5	6	7	8	9	10	11
Vert. height	approx. m	0.84	1.05	1.26	1.47	1.68	1.89	2.10	2.31
Spread	approx. m	1.31	1.52	1.73	1.94	2.15	2.36	2.57	2.78
Weight	approx. kg	27.0	30.0	34.0	37.0	40.0	45.0	48.0	51.0
Order no.		22210604	22210605	22210606	22210607	22210608	22210609	22210610	22210611

G

Number of steps		12	13	14	15	16	17	18	19
Vert. height	approx. m	2.52	2.73	2.94	3.15	3.36	3.57	3.78	3.99
Spread	approx. m	2.99	3.20	3.41	3.62	3.83	4.04	4.25	4.46
Weight	approx. kg	55.0	58.0	62.0	65.0	68.0	72.0	75.0	79.0
Order no.		22210612	22210613	22210614	22210615	22210616	22210617	22210618	22210619

Step width 800 mm

G

Number of steps		4	5	6	7	8	9	10	11
Vert. height	approx. m	0.84	1.05	1.26	1.47	1.68	1.89	2.10	2.31
Spread	approx. m	1.31	1.52	1.73	1.94	2.15	2.36	2.57	2.78
Weight	approx. kg	29.0	33.0	37.0	41.0	44.0	50.0	53.0	57.0
Order no.		22210804	22210805	22210806	22210807	22210808	22210809	22210810	22210811


Number of steps		12	13	14	15	16	17	18	19
Vert. height	approx. m	2.52	2.73	2.94	3.15	3.36	3.57	3.78	3.99
Spread	approx. m	2.99	3.20	3.41	3.62	3.83	4.04	4.25	4.46
Weight	approx. kg	61.0	65.0	69.0	73.0	76.0	81.0	84.0	89.0
Order no.		22210812	22210813	22210814	22210815	22210816	22210817	22210818	22210819

Step width 1,000 mm

G

Number of steps		4	5	6	7	8	9	10	11
Vert. height	approx. m	0.84	1.05	1.26	1.47	1.68	1.89	2.10	2.31
Spread	approx. m	1.31	1.52	1.73	1.94	2.15	2.36	2.57	2.78
Weight	approx. kg	31.0	35.0	40.0	44.0	48.0	54.0	58.0	62.0
Order no.		22211004	22211005	22211006	22211007	22211008	22211009	22211010	22211011

Number of steps		12	13	14	15	16	17	18	19
Vert. height	approx. m	2.52	2.73	2.94	3.15	3.36	3.57	3.78	3.99
Spread	approx. m	2.99	3.20	3.41	3.62	3.83	4.04	4.25	4.46
Weight	approx. kg	67.0	71.0	76.0	80.0	84.0	89.0	93.0	98.0
Order no.		22211012	22211013	22211014	22211015	22211016	22211017	22211018	22211019

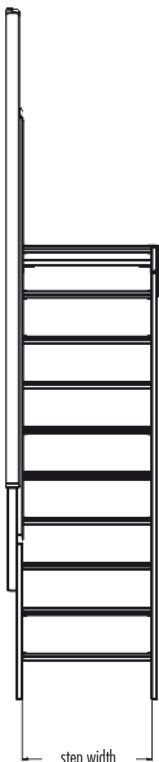

Platform extension including rail extension on request.
Aluminium or steel grating steps on request.

Accessories can be found on page 160.


Fixed stairs with platform Stair inclination 60° 2220

- Step width optionally 600, 800 or 1,000 mm.
- As standard with a handrail, may optionally be mounted on the left or the right, 2. Handrail at extra cost.
- 1,100 mm high guardrail on the platform, with knee bar and toeboard.
- Platform length 500 mm. Extension at intervals of 500 mm for aluminium profile steps and for grid platforms. Where aluminium chequer plate is used (step plate) intermediate sizes are possible. Platform lengths are limited to 2,500 mm in cantilever version.
- Aluminium profile steps 200 mm deep, alternative steel or aluminium grid steps 240 mm deep at additional cost on request.
- Standard design with 2 wall mounting brackets at top and ground brackets at bottom, on request at top with suspension hook or mounting bracket at additional cost.
- Triangular brackets must be used for side wall mounting (see accessories page 160), platform exit optionally on the left or on the right.
- Outer step width including single handrail = step width + 100 mm, or step width + 150 mm with double handrail.
- Intermediate sizes at price of next highest number of steps.
- Total load-bearing capacity 300 kg, step load 150 kg.
- Shipped in subassemblies pre-assembled in the factory.

Note: according to DIN 1055 and DIN 18065, these stairs are not permitted in residential buildings.



2220

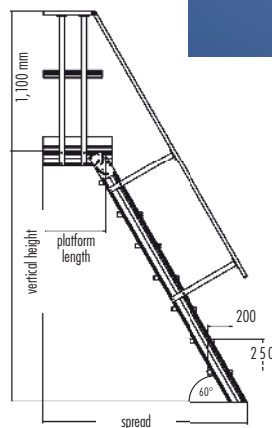

Step width 600 mm

Number of steps		4	5	6	7	8	9	10	11	12
Vert. height	approx. m	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00
Spread	approx. m	1.06	1.21	1.35	1.50	1.64	1.79	1.93	2.08	2.22
Weight	approx. kg	22.0	25.0	27.0	30.0	34.0	36.0	39.0	42.0	45.0
Order no.		22200604	22200605	22200606	22200607	22200608	22200609	22200610	22200611	22200612

G

Number of steps		13	14	15	16	17	18	19	20	21
Vert. height	approx. m	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25
Spread	approx. m	2.37	2.51	2.66	2.80	2.95	3.09	3.24	3.39	3.53
Weight	approx. kg	48.0	51.0	54.0	57.0	60.0	62.0	65.0	68.0	71.0
Order no.		22200613	22200614	22200615	22200616	22200617	22200618	22200619	22200620	22200621

Step width 800 mm

G

Number of steps		4	5	6	7	8	9	10	11	12
Vert. height	approx. m	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00
Spread	approx. m	1.06	1.21	1.35	1.50	1.64	1.79	1.93	2.08	2.22
Weight	approx. kg	24.0	28.0	30.0	33.0	38.0	40.0	44.0	47.0	51.0
Order no.		22200804	22200805	22200806	22200807	22200808	22200809	22200810	22200811	22200812

Number of steps		13	14	15	16	17	18	19	20	21
Vert. height	approx. m	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25
Spread	approx. m	2.37	2.51	2.66	2.80	2.95	3.09	3.24	3.39	3.53
Weight	approx. kg	54.0	57.0	61.0	64.0	67.0	70.0	74.0	77.0	80.0
Order no.		22200813	22200814	22200815	22200816	22200817	22200818	22200819	22200820	22200821

Step width 1,000 mm

G

Number of steps		4	5	6	7	8	9	10	11	12
Vert. height	approx. m	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00
Spread	approx. m	1.06	1.21	1.35	1.50	1.64	1.79	1.93	2.08	2.22
Weight	approx. kg	26.0	30.0	33.0	36.0	41.0	44.0	48.0	52.0	56.0
Order no.		22201004	22201005	22201006	22201007	22201008	22201009	22201010	22201011	22201012

Number of steps		13	14	15	16	17	18	19	20	21
Vert. height	approx. m	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25
Spread	approx. m	2.37	2.51	2.66	2.80	2.95	3.09	3.24	3.39	3.53
Weight	approx. kg	60.0	63.0	67.0	71.0	74.0	78.0	82.0	85.0	89.0
Order no.		22201013	22201014	22201015	22201016	22201017	22201018	22201019	22201020	22201021




Platform extension including rail extension on request.
Aluminium or steel grating steps on request.

Accessories can be found on page 160.

Mobile platform steps Stair inclination 45° 2231

- Step width optionally 600, 800 or 1,000 mm.
- Handrails on both sides as standard.
- 1,100 mm high guardrail on the platform, with knee bar and toeboard.
- Platform length 500 mm. Extension at intervals of 500 mm for aluminium profile steps and for grid platforms. Where aluminium chequer plate is used (step plate) intermediate sizes are possible.
- Aluminium profile steps 250 mm deep, alternative steel or aluminium grid steps 270 mm deep at additional cost on request.
- Front or side exit on request.
- Castors on steps section = 125 mm diameter castors with brakes.
- Castors on support section = beam with 160 mm diameter fixed castor, (brake possible).
- Overall step width including handrail on both sides = step width + 150 mm.
- Total load-bearing capacity 300 kg, step load 150 kg.
- Shipped in subassemblies pre-assembled in the factory.
- Low play castor bearings, therefore extremely stable.

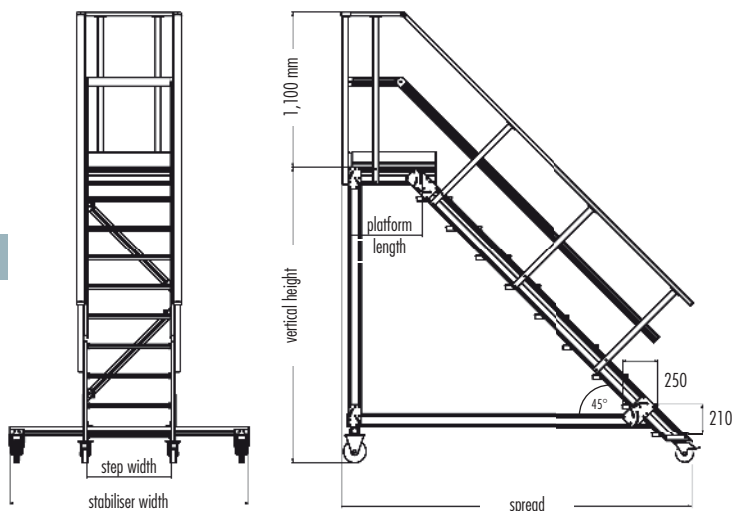

Step width 600 mm

G

Number of steps		4	6	8	10	12	14	16	18	20
Vert. height	approx. m	0.84	1.26	1.68	2.10	2.52	2.94	3.36	3.78	4.20
Running gear width	approx. m	1.00	1.00	1.00	1.40	1.60	2.00	2.20	2.20	2.20
Spread	approx. m	1.26	1.68	2.09	2.51	2.93	3.35	3.78	4.20	4.62
Weight	approx. kg	84.0	89.0	94.0	101.0	107.0	112.0	119.0	124.0	130.0
Order no.		22310604	22310606	22310608	22310610	22310612	22310614	22310616	22310618	22310620

Step width 800 mm

G

Number of steps		4	6	8	10	12	14	16	18	20
Vert. height	approx. m	0.84	1.26	1.68	2.10	2.52	2.94	3.36	3.78	4.20
Running gear width	approx. m	1.00	1.00	1.00	1.40	1.60	1.60	2.00	2.20	2.20
Spread	approx. m	1.26	1.68	2.09	2.51	2.93	3.35	3.78	4.20	4.62
Weight	approx. kg	86.0	92.0	98.0	106.0	113.0	119.0	127.0	133.0	140.0
Order no.		22310804	22310806	22310808	22310810	22310812	22310814	22310816	22310818	22310820

Step width 1,000 mm

G

Number of steps		4	6	8	10	12	14	16	18	20
Vert. height	approx. m	0.84	1.26	1.68	2.10	2.52	2.94	3.36	3.78	4.20
Running gear width	approx. m	1.00	1.00	1.00	1.40	1.40	1.60	2.00	2.20	2.20
Spread	approx. m	1.26	1.68	2.09	2.51	2.93	3.35	3.78	4.20	4.62
Weight	approx. kg	88.0	95.0	102.0	111.0	119.0	126.0	135.0	142.0	150.0
Order no.		22311004	22311006	22311008	22311010	22311012	22311014	22311016	22311018	22311020

Platform extension including rail extension on request.



Aluminium or steel grating steps on request.

Mobile platform steps Stair inclination 60° 2230

- Step width optionally 600, 800 or 1,000 mm.
- Handrails on both sides as standard.
- 1,100 mm high guardrail on the platform, with knee bar and toeboard.
- Platform length 500 mm. Extension at intervals of 500 mm for aluminium profile steps and for grid platforms. Where aluminium chequer plate is used (step plate) intermediate sizes are possible.
- Aluminium profile steps 200 mm deep, alternative steel or aluminium grid steps 240 mm deep at additional cost on request.
- Exit to the front or to the side on request.
- Castors on steps section = 125 mm diameter castors with brakes, castors on support section = beam with 160 mm diameter fixed castor (brake possible).



2230

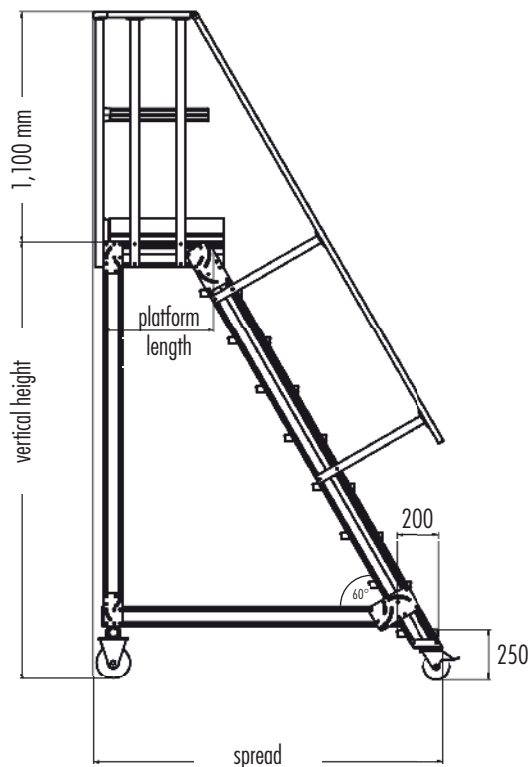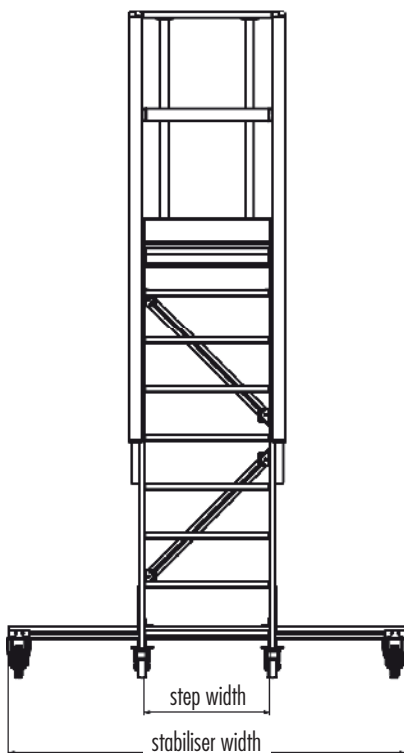

G
Step width 600 mm

Number of steps		4	6	8	10	12	14	16	18	20
Vert. height approx. m		1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50	5.00
Running gear width approx. m		1.40	1.40	1.40	1.60	1.80	2.00	2.20	2.20	2.20
Spread approx. m		1.08	1.37	1.66	1.95	2.24	2.53	2.81	3.10	3.39
Weight approx. kg		69.0	74.0	80.0	85.0	90.0	96.0	103.0	108.0	113.0
Order no.		22300604	22300606	22300608	22300610	22300612	20300614	22300616	22300618	22300620

G
Step width 800 mm

Number of steps		4	6	8	10	12	14	16	18	20
Vert. height approx. m		1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50	5.00
Running gear width approx. m		1.40	1.40	1.40	1.60	1.80	2.00	2.20	2.20	2.20
Spread approx. m		1.08	1.37	1.66	1.95	2.24	2.53	2.81	3.10	3.39
Weight approx. kg		71.0	77.0	84.0	90.0	96.0	102.0	110.0	116.0	122.0
Order no.		22300804	22300806	22300808	22300810	22300812	22300814	22300816	22300818	22300820

G
Step width 1,000 mm


Number of steps		4	6	8	10	12	14	16	18	20
Vert. height approx. m		1.00	1.50	2.00	2.50	3.00	3.50	4.00	4.50	5.00
Running gear width approx. m		1.40	1.40	1.40	1.60	1.80	2.00	2.20	2.20	2.20
Spread approx. m		1.08	1.37	1.66	1.95	2.24	2.53	2.81	3.10	3.39
Weight approx. kg		73.0	80.0	87.0	94.0	101.0	108.0	117.0	124.0	130.0
Order no.		22301004	22301006	22301008	22301010	22301012	22301014	22301016	22301018	22301020

Platform extension including rail extension on request.


Aluminium or steel grating steps on request.

Fixed crossing Stair inclination 45° 2241

- Step width optionally 600, 800 or 1,000 mm.
- As standard with a handrail, may optionally be mounted on the left or the right, 2. Handrail at extra cost.
- 1,100 mm high guardrail on the platform, with knee bar and toeboard.
- Platform length 500 mm. Extension at intervals of 500 mm for aluminium profile steps and for grid platforms. Where aluminium chequer plate is used (step plate) intermediate sizes are possible.
- Clear width = platform length – 150 mm
- Platform lengths restricted in cantilever version.
- Aluminium profile steps 250 mm deep, alternative steel or aluminium grid steps 270 mm deep at additional cost on request.
- Standard design with ground bracket at bottom, **must be screwed to floor.**
- Outer step width including single handrail = step width + 100 mm, or step width + 150 mm with double handrail
- Intermediate sizes at price of next highest number of steps
- Total load-bearing capacity 300 kg, step load 150 kg.
- Shipped in subassemblies pre-assembled in the factory.

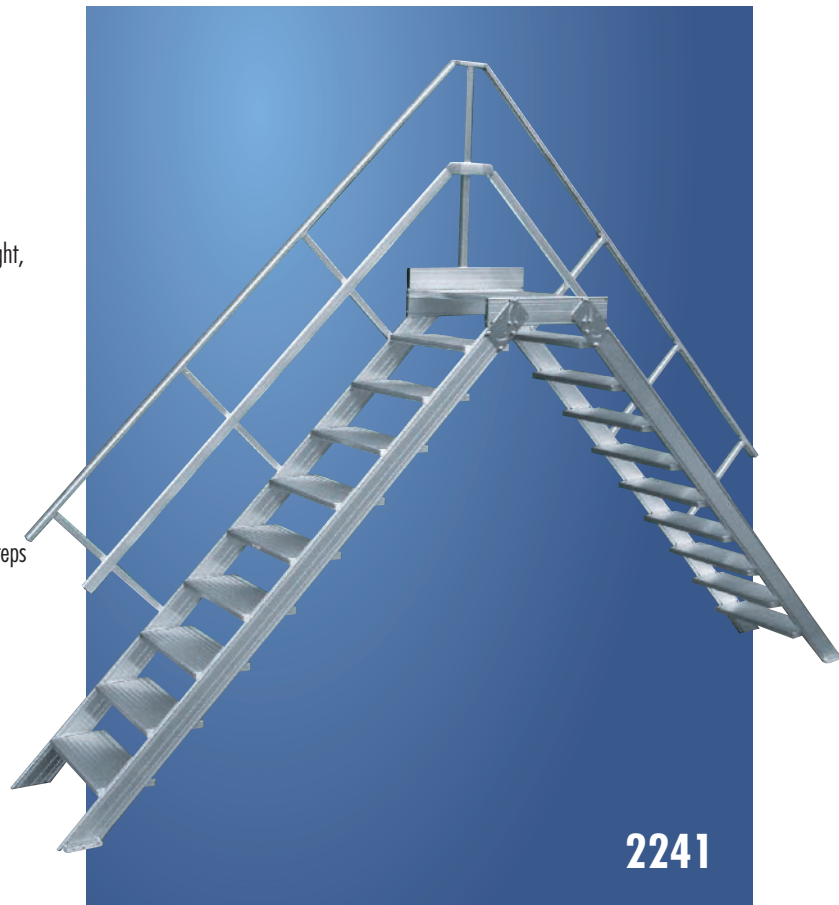

Note: mobile version with bracings and stabilisers possible on request.

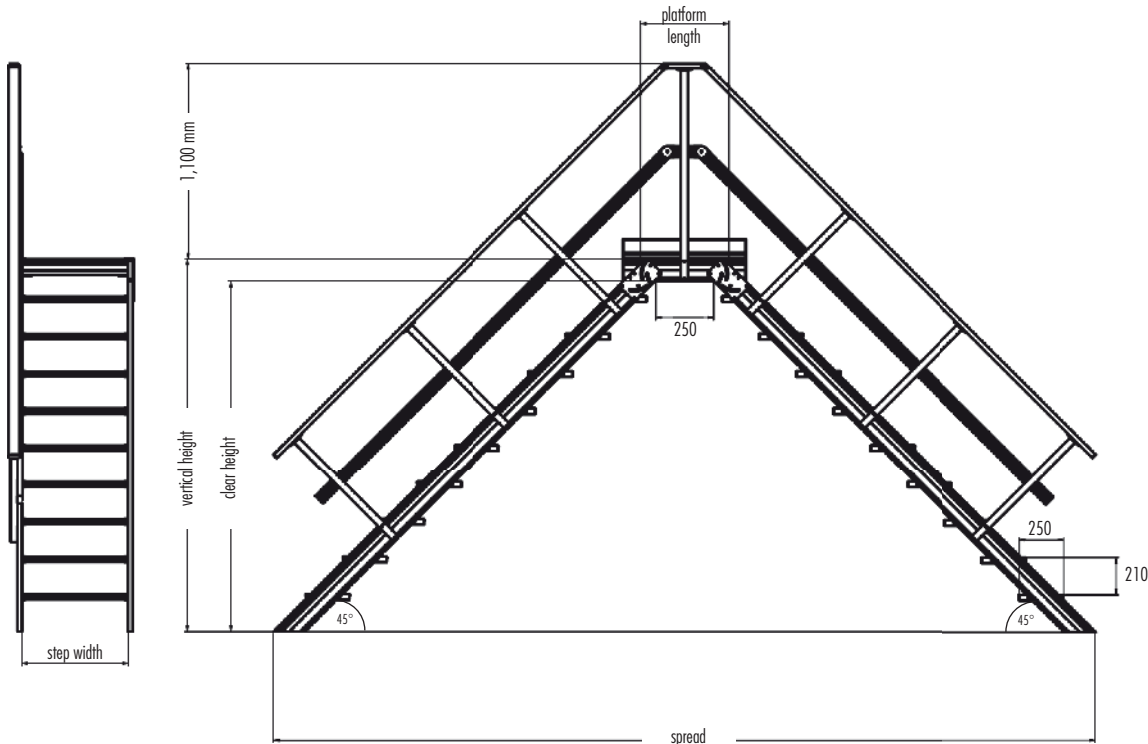

Step width 600 mm

G

Number of steps		3	4	5	6	7	8	9	10	11
Vert. height	approx. m	0.63	0.84	1.05	1.26	1.47	1.68	1.89	2.10	2.31
Clear height	approx. m	0.50	0.71	0.92	1.13	1.34	1.55	1.76	1.97	2.18
Spread	approx. m	1.65	2.07	2.49	2.91	3.33	3.75	4.17	4.59	5.01
Weight	approx. kg	36.0	42.0	49.0	56.0	63.0	72.0	78.0	85.0	92.0
Order no.		22410603	22410604	22410605	22410606	22410607	22410608	22410609	22410610	22410611

Step width 800 mm

G

Number of steps		3	4	5	6	7	8	9	10	11
Vert. height	approx. m	0.63	0.84	1.05	1.26	1.47	1.68	1.89	2.10	2.31
Clear height	approx. m	0.50	0.71	0.92	1.13	1.34	1.55	1.76	1.97	2.18
Spread	approx. m	1.65	2.07	2.49	2.91	3.33	3.75	4.17	4.59	5.01
Weight	approx. kg	38.0	44.0	52.0	59.0	67.0	76.0	83.0	90.0	98.0
Order no.		22410803	22410804	22410805	22410806	22410807	22410808	22410809	22410810	22410811

Step width 1,000 mm

G

Number of steps		3	4	5	6	7	8	9	10	11
Vert. height	approx. m	0.63	0.84	1.05	1.26	1.47	1.68	1.89	2.10	2.31
Clear height	approx. m	0.50	0.71	0.92	1.13	1.34	1.55	1.76	1.97	2.18
Spread	approx. m	1.65	2.07	2.49	2.91	3.33	3.75	4.17	4.59	5.01
Weight	approx. kg	39.0	48.0	54.0	62.0	70.0	80.0	87.0	95.0	103.0
Order no.		22411003	22411004	22411005	22411006	22411007	22411008	22411009	22411010	22411011


Platform extension including rail extension on request.

Aluminium or steel grating steps on request.

Fixed or mobile bridging stairs Stair inclination 60° 2240

- Step width optionally 600, 800 or 1,000 mm.
- As standard with a handrail, may optionally be mounted on the left or the right, 2. Handrail at extra cost.
- 1,100 mm high guardrail on the platform, with knee bar and toeboard.
- Platform length 500 mm. Extension at intervals of 500 mm for aluminium profile steps and for grid platforms. Where aluminium chequer plate is used (step plate) intermediate sizes are possible.
- Clear width = platform length - 150 mm.
- Platform lengths restricted in cantilever version.
- Aluminium profile steps 200 mm deep, alternative steel or aluminium grid steps 240 mm deep at additional cost on request.
- Standard design with ground bracket at bottom, **must be screwed to floor**.
- Outer step width including single handrail = step width + 100 mm, or step width + 150 mm with double handrail.
- Intermediate sizes at price of next highest number of steps
- Total load-bearing capacity 300 kg, step load 150 kg.
- Shipped in subassemblies pre-assembled in the factory.

Note: mobile version with bracings and stabilisers possible on request.

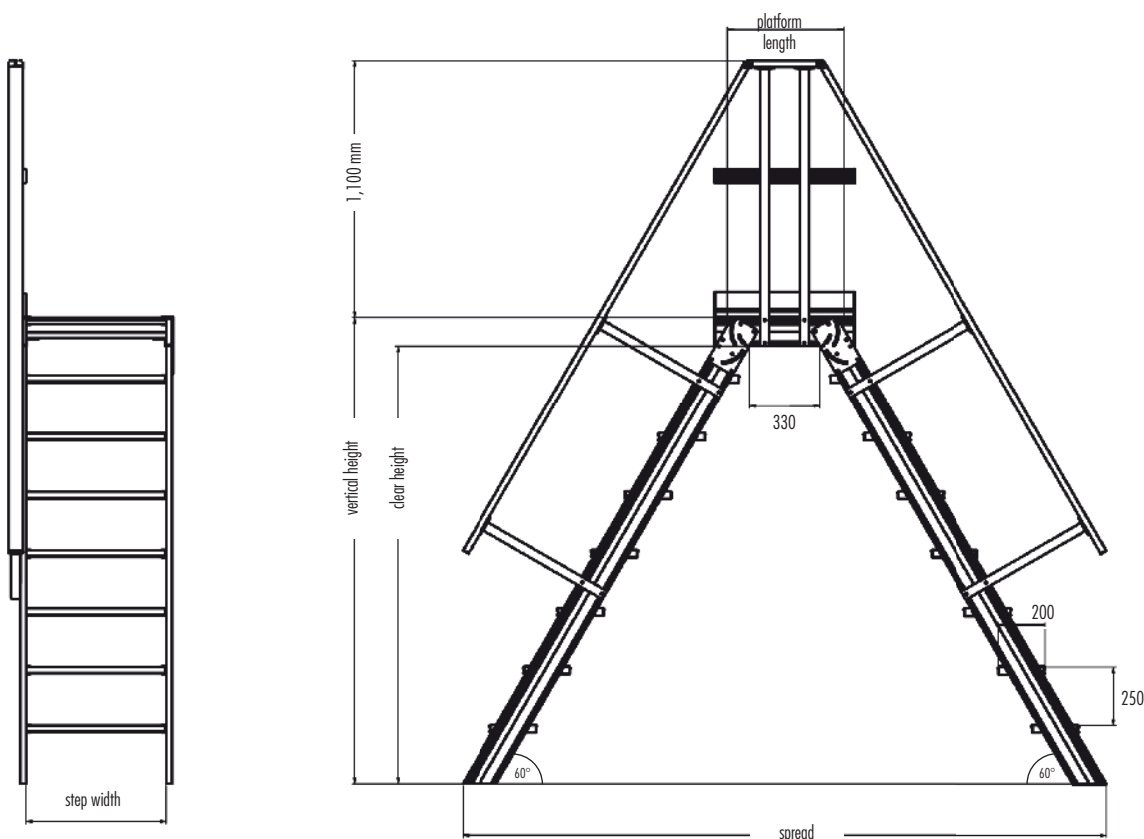

Step width 600 mm

G

Number of steps		3	4	5	6	7	8	9	10	11
Vert. height	approx. m	0.75	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75
Clear height	approx. m	0.62	0.87	1.12	1.37	1.62	1.87	2.12	2.37	2.62
Spread	approx. m	1.31	1.60	1.89	2.18	2.46	2.75	3.04	3.33	3.62
Weight	approx. kg	28.0	33.0	39.0	45.0	50.0	57.0	63.0	68.0	74.0
Order no.		22400603	22400604	22400605	22400606	22400607	22400608	22400609	22400610	22400611

Step width 800 mm

G

Number of steps		3	4	5	6	7	8	9	10	11
Vert. height	approx. m	0.75	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75
Clear height	approx. m	0.62	0.87	1.12	1.37	1.62	1.87	2.12	2.37	2.62
Spread	approx. m	1.31	1.60	1.89	2.18	2.46	2.75	3.04	3.33	3.62
Weight	approx. kg	30.0	35.0	42.0	48.0	53.0	61.0	67.0	73.0	79.0
Order no.		22400803	22400804	22400805	22400806	22400807	22400808	22400809	22400810	22400811

Step width 1,000 mm

G

Number of steps		3	4	5	6	7	8	9	10	11
Vert. height	approx. m	0.75	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75
Clear height	approx. m	0.62	0.87	1.12	1.37	1.62	1.87	2.12	2.37	2.62
Spread	approx. m	1.31	1.60	1.89	2.18	2.46	2.75	3.04	3.33	3.62
Weight	approx. kg	31.0	37.0	44.0	52.0	56.0	64.0	71.0	77.0	84.0
Order no.		22401003	22401004	22401005	22401006	22401007	22401008	22401009	22401010	22401011

Platform extension including rail extension on request.

Aluminium or steel grating steps on request.