

Roof ladders complying with DIN 18160-5 4092/4093/4095/4096/4097

Quality features of Hymer roof ladders:

- Available in natural aluminium, brick red, sorrel red, sepia brown and anthracite finishes.
- Three different lengths in the range.
- Flexible for any roof length, as can be combined with connection plates.
- Additional fixing plates against slipping.
- Connection plates made from robust solid aluminium profile as an accessory.
- High-quality T-stile (85 mm) with robust angle profile for high stiffness and large bearing surface.
- Rungs screwed to the stile in 4 places, with additional fixing in the stile.
- May be used for 35 and 60 degree roof pitch.
- Attractive design with stiles closed at the side.
- Protective edge available as an accessory.

- Complies with DIN 18160-5.
- Non-slip, ribbed rungs with a flat side and a steep side to adapt to the roof pitch.

Depending on roof pitch either the flat or the slanted side of the rung can be used as stepping surface. Roof ladders must be installed at right angles to the ridge.

Roof ladders must be secured on the second rung from top with roof hooks according to DIN EN 517. The foot of the ladder is to be secured against moving sideways by more than 30 cm, e.g. with safety roof hooks as per DIN EN 517.



S

S

S

		4095 aluminium		
Number of rungs		7	10	14
Length	approx. m	1.95	2.80	3.90
Width	approx. mm	350	350	350
Weight	approx. kg	3.5	4.9	6.8
EAN code		4019502307537	4019502307544	4019502307551
Order no.		409507	409510	409514







		4096 RAL 8004 brick red coated		
Number of rungs		7	10	14
Length	approx. m	1.95	2.80	3.90
Width	approx. mm	350	350	350
Weight	approx. kg	3.5	4.9	6.8
EAN code		4019502307568	4019502307575	4019502307582
Order no.		409607	409610	409614

		4097 sorrel red coated		
Number of rungs		7	10	14
Length	approx. m	1.95	2.80	3.90
Width	approx. mm	350	350	350
Weight	approx. kg	3.5	4.9	6.8
EAN code		4019502335202	4019502335219	4019502335226
Order no.		409707	409710	409714

Accessories (see also page 171):

- ① Connecting plates to connect the ladder sections
Order no. 005907, (1 set = 2 plates with screws)
- ② Roof hook for slate, order no. 008923
- ③ Roof hook for tiles and pantiles, galvanized, order no. 008924
Roof hook for tiles and pantiles, brick red, order no. 008925
Roof hook for tiles and pantiles, sepia brown, order no. 008926
Roof hook for tiles and pantiles, anthracite, order no. 008919
Roof hook for tiles and pantiles, sorrel red, order no. 008918
- ④ Roof hook for plaint tiles, galvanized, order no. 008949
Roof hook for plaint tiles, brick red, order no. 008950
- ⑤ Anti-lift device, order no. 008940

The roof hook may only be fixed to rafters or equivalent load-carrying roof structures.




Rung pitched side

Anti-lift device loose

Rung flat side


Anti-lift device mounted

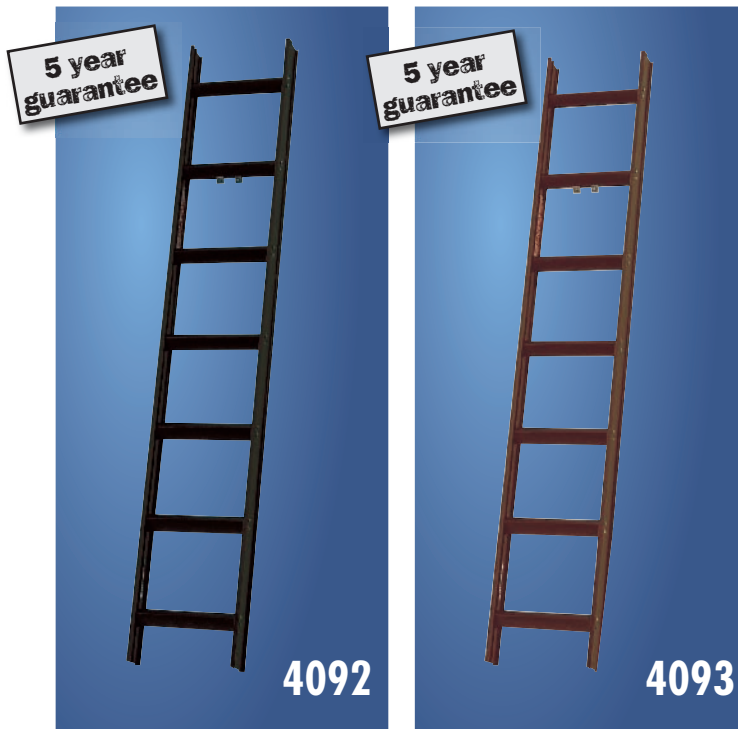

S

S

	4092 RAL 7016 anthracite coated			4093 RAL 8014 dark brown coated		
Number of rungs	7	10	14	7	10	14
Length approx. m	1.95	2.80	3.90	1.95	2.80	3.90
Width approx. mm	350	350	350	350	350	350
Weight approx. kg	3.5	4.9	6.8	3.5	4.9	6.8
EAN code	4019502313545	4019502313552	4019502313569	4019502307476	4019502307483	4019502307490
Order no.	409207	409210	409214	409307	409310	409314

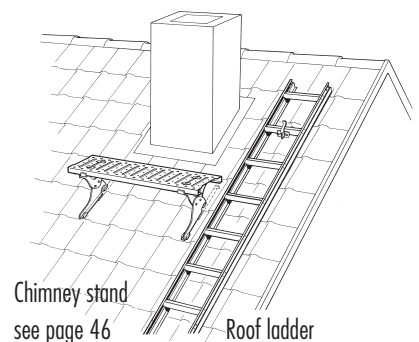

Chimney stand
see page 46

Roof ladder

Chimney stand European standard EN 516, DIN 18160-5 008927/008928/008929/008930

- For roof tiles and large tiles, hooks in.
- Adjustable in four angles from 15° to 60°.
- Stand 250 mm wide.
- Set consisting of two universal stand supports and one 800 mm long stand complete with fastening material.
- Weight 8.0 kg.
- Load-carrying up to 1.5 kN (150 kg).

5 year guarantee



Roof ladders see page 44/45.

G

Colour	galvanised	brick red	dark brown	black
EAN code	4019502313965	4019502313972	4019502313989	4019502326071
Order no.	008927	008928	008929	008930

Universal chimney stand on request also available in auburn red.

5 year guarantee



7-4035


Roof ladder, wood 7-4035

- Stiles made of high-strength, elastic plywood.
- The chamfered stile ends make it easier to push the ladder up.
- Straight rungs with curved cut-out.
- Ladder width 35 cm.

Important: Only roof hooks complying with EN 517 of a certified design are permitted for hooking and securing ladders to the roof. When working on ladders, fall-protection devices are always to be used.

S

Number of rungs	8	10	12	14	16	18
Length approx. m	2.30	3.00	3.50	4.00	4.50	5.00
Weight approx. kg	4.7	7.0	8.0	9.0	10.5	11.5
EAN code	4019502330344	4019502315716	4019502315723	4019502315730	4019502315747	4019502315754
Order no.	7403508	7403510	7403512	7403514	7403516	7403518

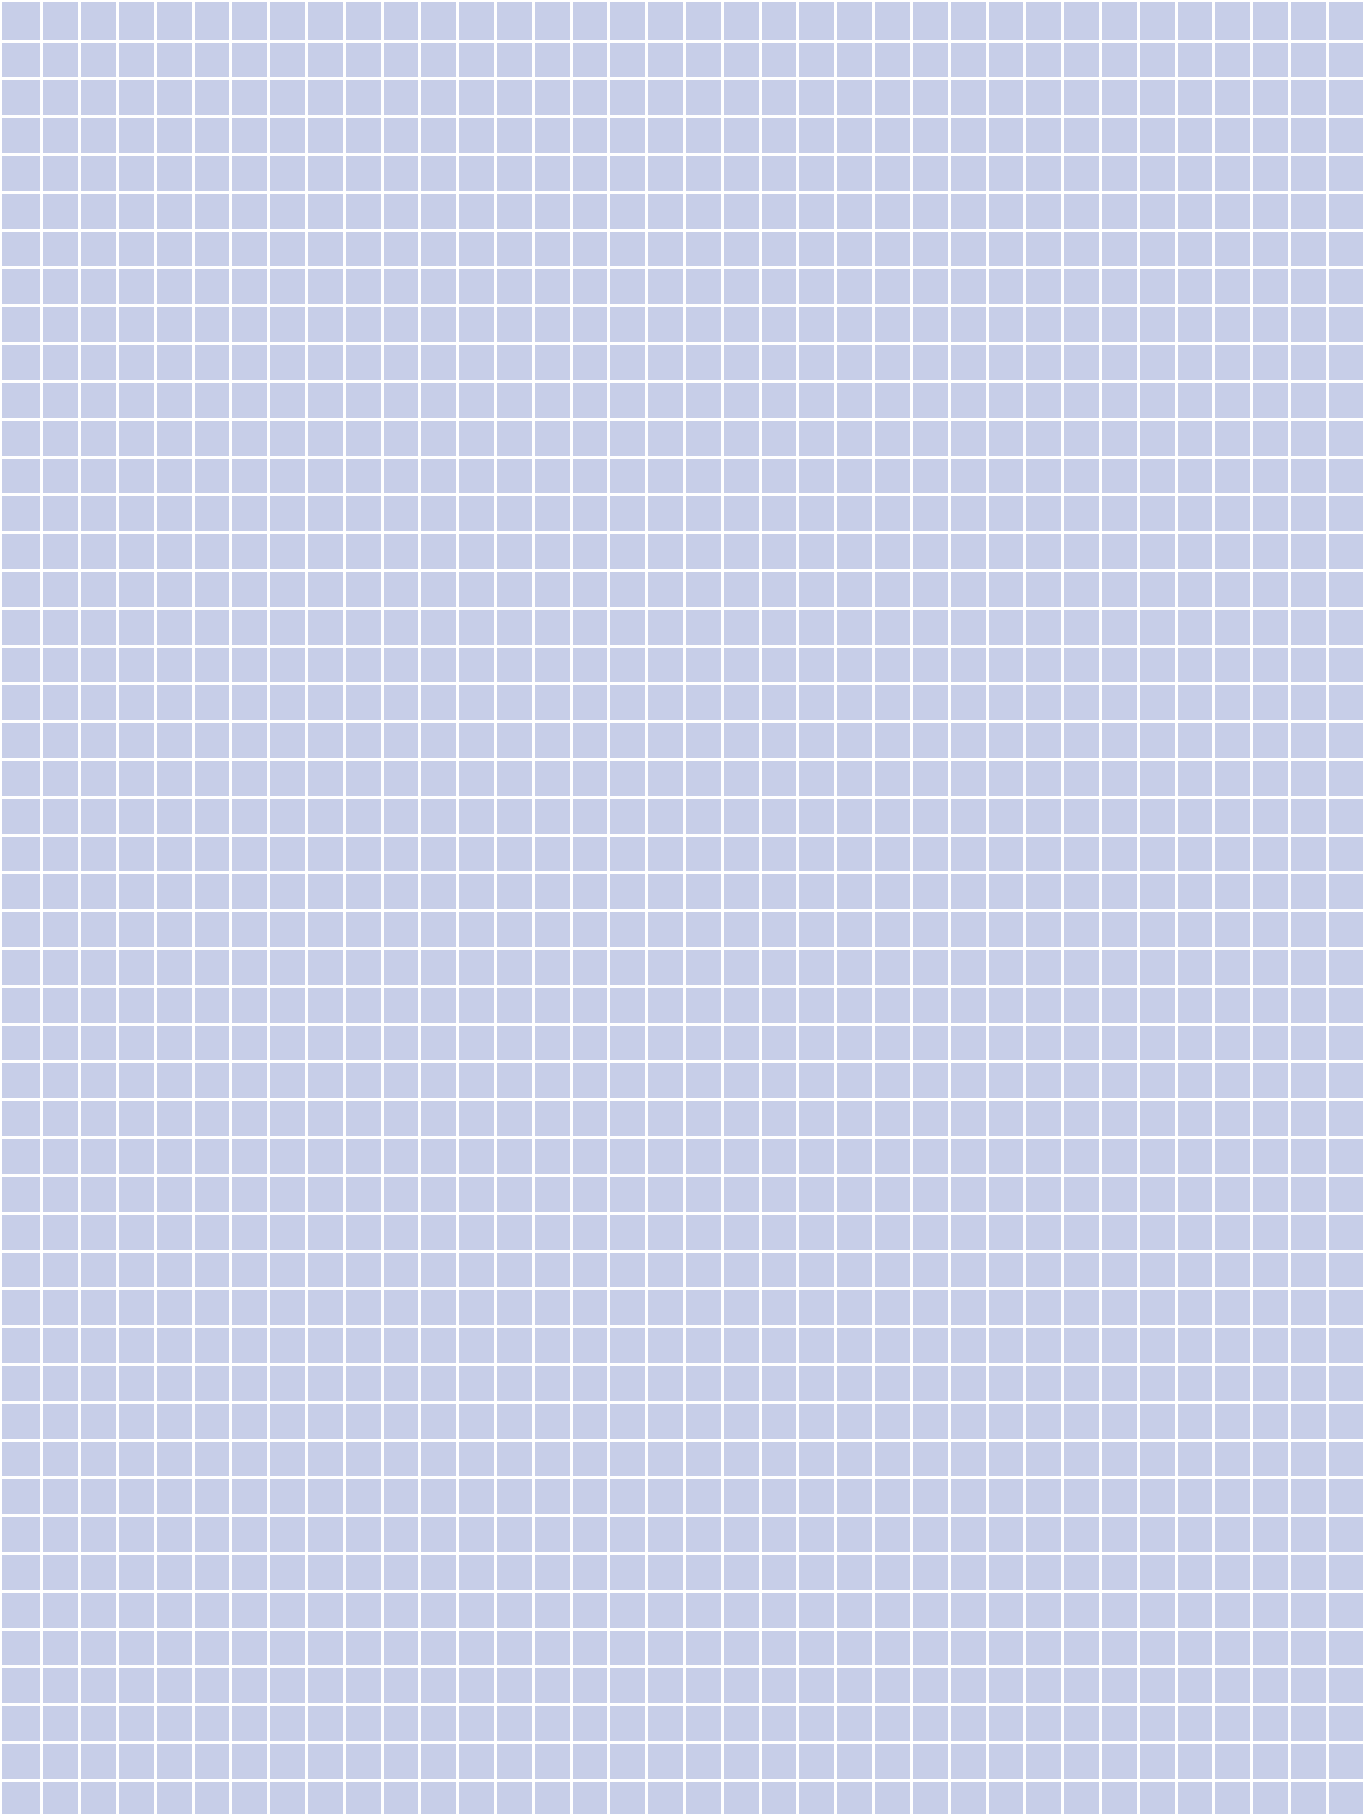

Wallpapering table, 3 m long, 60 or 80 cm wide 6851/00 or 6850/00

5 year
guarantee



- Wallpaper and multipurpose table with two folding sections for many uses in hobbies, leisure, around the home and garden.
- Easy to store thanks to compact size when folded, easy to transport and easy to install.
- Stable aluminium table frame with plywood table top.
- Robust tubular folding frame with secure locking mechanism.
- Large table, folds in two sections.
- Printed ruler.
- Permitted load 100 kg.
- Clean the table-top thoroughly before use, especially when sensitive papers are to be pasted.



Stable wooden table top with aluminium frame all round




Feet width 430 mm, seamless extruded profile, caps on the tube ends



Printed ruler



The strong carrying handle lies flat



Steel hinges

G

Length	approx. m	3.05	3.05
Width	approx. mm	600	800
Height	approx. m	0.78	0.78
Folded size L x W x H	approx. m	1.05 x 0.60 x 0.10	1.05 x 0.80 x 0.10
Weight	approx. kg	15.0	18.0
EAN code		4019502314450	4019502314443
Order no.		685100	685000

Wallpapering table extension 6852

- For tables 6850 and 6851.
- 20 cm wide (60 cm table extended to 80 cm wide, 80 cm table extended to 100 cm wide).
- Simple fitting with wing bolts.
- See also accessories on page 170.

Length	approx. m	3.05
Width	approx. mm	200
Weight	approx. kg	5.5
EAN code		4019502314467
Order no.		685200

G



6852

Wallpaper table, height-adjustable, 3 m long, 60 or 80 cm wide 6851/01 or 6850/01

- With new mechanism for height adjustment.
- A simple yet ingenious solution: The worktop, adjusted from a height of 78 cm to 86 cm with a single action and no accessories.
- Stability and resistance to tipping over not impaired by Hymer's own technology.
- As no accessories are required, the table can be folded back down just as quickly as it was set up.
- Permitted load 80 kg.
- Clean the table-top thoroughly before use, especially when sensitive papers are to be pasted.



6851/01








G

Length	approx. m	3.05	3.05
Width	approx. mm	600	800
Height	approx. m	0.78 + 0.86	0.78 + 0.86
Folded size L x W x H	approx. m	1.05 x 0.60 x 0.10	1.05 x 0.80 x 0.10
Weight	approx. kg	15.0	18.0
EAN code		4019502329621	4019502329638
Order no.		685101	685001



Telesteg® aluminium extension plank 6859

- Extendable aluminium plank can be divided in the middle.
- Fully extended, it is a large, safe work platform for all applications.
- The two outer parts of the Telesteg can be opened telescopically up to the desired length between 2.40 and 4.00 metres.
- Can also be used as double-width, short plank, simply separate in the middle and place next to each other.
- Load bearing capacity at support width of 3.50 m, point load: 150 kg.

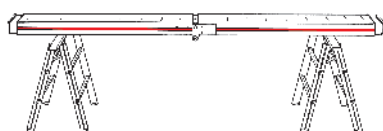

Transport lock:

Duplicate function of the telescope lock, also acts as a transport lock for the stacked single boards.

Telescopic lock:

Rocker lever for safe, convenient locking of the telescopic rail.

Locking hook:

Fast and safer locking of the two individual elements – with locking lever.

Cotter pin, hook lock and telescopic lock available as spare parts, see page 175.

G

Length extended (both sections)	approx. m	4.00
Length extended (one section)	approx. m	2.00
Length closed (one section)	approx. m	1.24
Folded size L x W x H	approx. m	1.25 x 0.30 x 0.20
Weight	approx. kg	22.0
EAN code		4019502314573
Order no.		685900

Telescopic aluminium plank 6866

- Load-bearing capacity 150 kg.
- Available in two lengths.

Length	approx. m	1.79 - 2.90	2.08 - 3.50
Width	approx. mm	270	270
Weight	approx. kg	12.2	13.9
EAN code		4019502325616	4019502325623
Order no.		686601	686602

5 year guarantee




G

6866

Assembly platform 6864

- High stability.
- Set up in seconds.
- Legs automatically lock in working and transport position.
- Easy to transport with grip handle in the platform surface.
- Load: 3.0 kN (300 kg) distributed load.



5 year guarantee



G

6864

Work surface	approx. m	1.70 x 0.50
Standing height	approx. m	0.55
Working height	approx. m	2.05
Reach height	approx. m	2.55
Folded size L x W x H	approx. m	1.75 x 0.60 x 0.20
Weight	approx. kg	18.0
EAN code		4019502314016
Order no.		686400

Leg extension set 0051856

- Stile extensions for variable height adjustment of the assembly platform from 0.57 m to 0.82 m.
- Working height with extensions 2.60 m to 2.85 m.
- For ladder stile dimension 60 mm.
- Adjustment range approx. 25 cm.
- Stepless adjustment.
- Fits without tools.
- Content: 2 extensions including fasteners.
- See also accessories on page 170.

5 year guarantee



G

Weight	approx. kg	1.0
EAN code		4019502314023
Order no.		0051856

0051856