



Combination ladder, two-section 6045

- Combination freestanding ladder and extension ladder with two different possible uses.
- Stiles made of seamless extruded profiles with ergonomic shape for a safe grip.
- Rungs also made of extruded profiles, therefore sharper ribbing of the tread surface and thus increased grip.
- Internal width of ladder 300 mm (top section).
- New stabiliser with 125 mm floor clearance.



Recommended accessories:

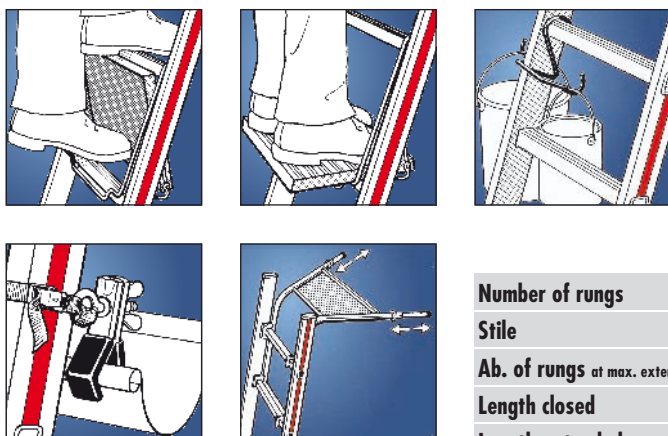

More accessories can be found from page 162 onwards.

**10 year
guarantee**



6045

You will find further combination ladders on pages 16, 17, 32. **S**

Number of rungs		2x6	2x8	2x10	2x12	2x14
Stile	approx. mm	60	60	66	71	83
Ab. of rungs at max. extend		10	14	17	21	25
Length closed	approx. m	1.83	2.39	2.95	3.52	4.08
Length extended	approx. m	2.95	4.07	4.91	6.04	7.16
Standing ht, freestanding ladder	approx. m	1.07	1.59	2.12	2.65	2.91
Working ht, stepladder	approx. m	2.57	3.09	3.62	4.15	4.41
Reach ht, stepladder	approx. m	3.07	3.59	4.12	4.65	4.91
Standing ht, leaning ladder	approx. m	1.92	3.00	3.82	4.90	5.98
Working ht, ladder	approx. m	3.42	4.50	5.32	6.40	7.48
Reach ht, ladder	approx. m	3.92	5.00	5.82	6.90	7.98
Vert. ht, ladder	approx. m	1.72	2.25	2.78	3.30	3.84
Width top/bottom	approx. mm	425/960	425/960	425/960	425/960	425/1150
Weight	approx. kg	7.9	9.8	11.8	15.2	17.8
EAN code		4019502338555	4019502338562	4019502338579	4019502338586	4019502338593
Order no.		604512	604516	604520	604524	604528

For an explanation of working height/reach height in accordance with BGI 694, see page 10.


Combination ladder, three-section 6047

- Combination freestanding ladder and extension ladder with 6 different possible uses: freestanding ladder, freestanding ladder with extension, one-, two- or three-section leaning ladder, freestanding stairway ladder.
- Upper and middle section with anti-lift device against unintentional detachment.
- Stiles made of seamless extruded profiles with ergonomic shape for a safe grip.
- Rungs also made of extruded profiles, therefore sharper ribbing of the tread surface and thus increased grip.
- Internal width of ladder 300 mm (top section).
- New stabiliser with 125 mm floor clearance.
- Short clamp fitting for using the ladder in stairway configuration up to a size of 3x9, pre-fitted as standard.
- Stairway configuration not standard from size 3x10 on. Long clamp fittings available as accessory (order no. 0054489), see also page 165.
- With wall wheels as standard from size 3x10.
- Two rigid braces against unintentional folding.






10 year guarantee



6047

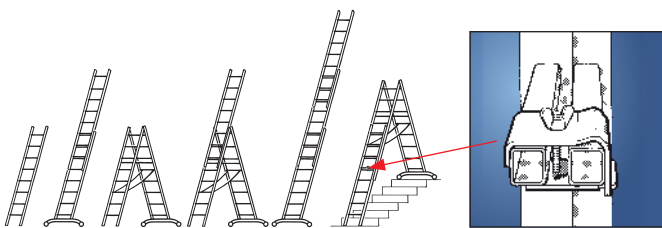

Recommended accessories:



More accessories can be found from page 162 onwards.


S

Number of rungs		3x6	3x7	3x8	3x9	3x10	3x12	3x14
Stile	approx. mm	60	66	71	83	83	89	89
Ab. of rungs at max. extend		14	16	19	21	24	29	34
Length closed	approx. m	1.95	2.22	2.50	2.79	3.06	3.62	4.18
Length extended	approx. m	4.19	4.75	5.59	6.15	6.98	8.38	9.78
Standing ht, freestanding ladder	approx. m	1.60	2.13	2.65	2.92	3.44	4.49	5.28
Working ht, stepladder	approx. m	3.10	3.63	4.15	4.12	4.94	5.99	6.78
Reach ht, stepladder	approx. m	3.60	4.13	4.65	4.92	5.44	6.49	7.28
Standing ht, leaning ladder	approx. m	3.00	3.54	4.35	4.89	5.70	7.06	8.41
Working ht, ladder	approx. m	4.50	5.04	5.85	6.39	7.20	8.56	9.91
Reach ht, ladder	approx. m	5.00	5.54	6.35	6.89	7.70	9.06	10.41
Vert. ht, ladder	approx. m	2.89	3.42	3.95	4.20	4.73	5.78	6.57
Width top/bottom	approx. mm	495/1030	495/1030	495/1030	495/1150	495/1150	495/1150	495/1150
Weight	approx. kg	12.4	14.2	17.0	20.6	22.4	29.1	34.6
EAN code		4019502338487	4019502338494	4019502338500	4019502338517	4019502338524	4019502338531	4019502338548
Order no.		604718	604721	604724	604727	604730	604736	604742

Double-sided freestanding rung ladder 6023

- Conical double-sided freestanding ladder.
- Rungs made of extruded profiles, therefore more deep ribbing of the tread surface and thus increased grip.
- Universal foot extension (available as accessory) enables further positions and possible uses.
- High level of stability due to feet in leaning angle with large contact area.
- Safety locking device with high-strength, 30 mm wide nylon straps.

Recommended accessories:

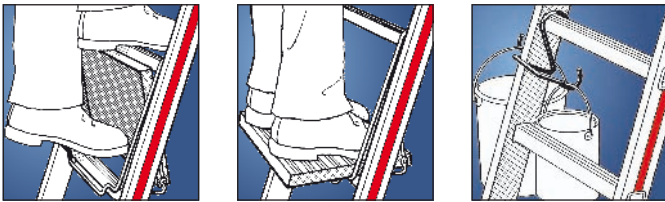

Replacement part: Hinge pair set

up to size 2x12 Order no. 0054045

up to size 2x14 Order no. 0054046

See also accessories on page 175.

10 year guarantee



6023

More accessories can be found from page 162 onwards.

You will find freestanding rung ladders on pages 20, 21, 22, 40. **S**

Number of rungs		2x5	2x6	2x7	2x8	2x9	2x10	2x12	2x14
Stile	approx. mm	60	60	60	60	60	60	60	71
Length	approx. m	1.57	1.85	2.13	2.40	2.69	2.95	3.53	4.10
Standing height	approx. m	1.10	1.35	1.65	1.90	2.15	2.45	3.00	3.50
Working height	approx. m	2.60	2.85	3.15	3.40	3.65	3.95	4.50	5.00
Reach height	approx. m	3.10	3.35	3.65	3.90	4.15	4.45	5.00	5.50
Vert. ht, ladder	approx. m	1.45	1.70	2.00	2.25	2.50	2.75	3.30	3.85
Width top/bottom	approx. mm	340/505	340/535	340/565	340/595	340/625	340/655	340/715	340/775
Width between stiles	approx. m	1.00	1.15	1.30	1.45	1.60	1.85	2.05	2.40
Weight	approx. kg	5.7	6.6	7.7	9.0	9.9	11.2	14.0	17.2
EAN code		4019502338722	4019502338739	4019502338746	4019502338753	4019502338760	4019502338777	4019502338784	4019502338791
Order no.		602310	602312	602314	602316	602318	602320	602324	602328

For an explanation of working height/reach height in accordance with BGI 694, see page 10.



0050376

0050376 Universal foot extension set for freestanding rung ladder 6023

- Continuous adjustment up to 1,000 mm.
- Numerous possible uses on all stairway types.
- Robust locking device.
- See also accessories on page 166.

German patent: 3806999

Only two extensions at one time permitted by industrial employers' liability insurance association

Stile	approx. mm	60x24
Adjustment range	approx. mm	1000
EAN code		4019502316850
Order no.		0050376

S