


Step leaning ladder 8012






- With hook can also be used as shelf ladder.
- As standard with top-mounted board.
- Reinforced step, 8 cm deep. Leaning angle 68°.
- Step distance 25 cm.

**15 year
guarantee**



Top-mounted board as standard

Recommended accessories:




30 mm suspension hook set

Order no. 0050420

60 mm suspension hook set

Order no. 0050421

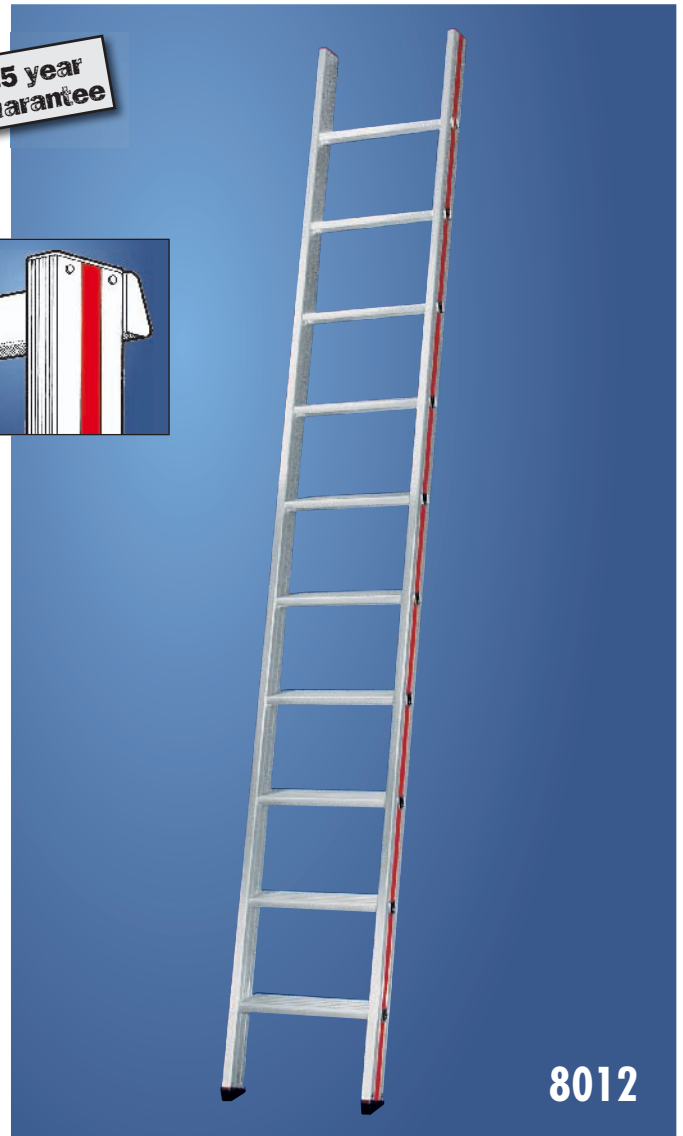

8012

You will find further step leaning ladders on page 30.

More accessories can be found from page 162 onwards.

S

Number of steps	6	7	8	9	10	11	12	13	15	17
Stile approx. mm	71	71	71	71	71	71	71	71	71	71
Length approx. m	1.73	1.95	2.23	2.48	2.73	2.97	3.20	3.49	3.98	4.48
Standing height approx. m	0.70	0.95	1.20	1.45	1.70	1.95	2.20	2.45	2.95	3.45
Working height approx. m	2.20	2.45	2.70	2.95	3.20	3.45	3.70	3.95	4.45	4.95
Reach height approx. m	2.70	2.95	3.20	3.45	3.70	3.95	4.20	4.45	4.95	5.45
Vert. ht, ladder approx. m	1.60	1.80	2.05	2.25	2.50	2.75	2.95	3.20	3.65	4.10
Vert. ht to top step approx. m	1.40	1.65	1.85	2.10	2.30	2.55	2.80	3.00	3.50	3.95
Width approx. mm	405	405	405	405	405	405	405	405	405	405
Weight approx. kg	4.0	4.6	5.2	5.8	6.4	7.0	7.7	8.2	9.4	10.5
EAN code	4019502315938	4019502315945	4019502315952	4019502315969	4019502315976	4019502315983	4019502315990	4019502316003	4019502316010	4019502316027
Order no.	801206	801207	801208	801209	801210	801211	801212	801213	801215	801217

For an explanation of working height/reach height in accordance with BGI 694, see page 10.