



Telestep® telescopic ladder, four section 8042

- Extremely compact leaning ladder, stepladder and stairway ladder.
- With the Hymer-Telestep, stable adjustment to uneven floor surfaces or stairs is possible.
- Simple, effortless operation.
- Low space requirements for storage and transport.


Description of functions:



The grips attached to the side of the high quality screwed joint with duplex lock ensure very easy handling when adjusting or converting the ladder.




Hinges do not lock in freestanding ladder function and transport position. The ladder can therefore be folded and unfolded with one hand.



The load on the hinges is distributed over two stable, high-quality bolts, which considerably increases the load-bearing capacity, specially designed for continuous use. Maximum protection of the hinge against dirt thanks to ideally shaped steel parts.



Reliable locking devices made of solid cast aluminium parts. The required length can be easily obtained by pulling out the locking device and moving the ladder parts.



Accessories: Foot extension
adjustment range approx. 45 cm
Use only possible from size 4x4.
Order no. 0050302
See also accessories on page 166.

More accessories can be found from page 162 onwards.

Replacement part: Rung cover set

Order no. 0054047


See also spare parts on page 175.

15 year
guarantee



8042


You will find further telescopic ladders on page 18.

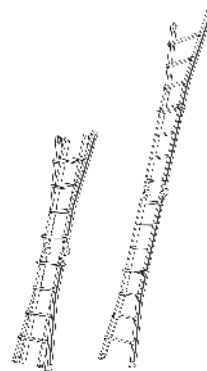

Length-adjustable leaning ladder



Height-adjustable freestanding ladder



Stairway freestanding ladder

S

Number of rungs		4x3	4x4	4x5	4x6
Stile	approx. mm	60	60	60	60
Length ladder	approx. m	1.85 - 2.92	2.35 - 4.02	2.90 - 5.14	3.46 - 6.26
Vert. ht, stepladder	approx. m	0.90 - 1.40	1.15 - 1.95	1.40 - 2.49	1.70 - 3.03
Standing ht, freestanding ladder	approx. m	0.72	1.26	1.80	2.35
Working ht, stepladder	approx. m	2.22	2.76	3.30	3.85
Reach ht, stepladder	approx. m	2.72	3.26	3.80	4.35
Standing ht, leaning ladder	approx. m	2.10	3.00	4.10	5.20
Working ht, ladder	approx. m	3.60	4.50	5.60	6.70
Reach ht, ladder	approx. m	4.10	5.00	6.10	7.20
Folded L x W x H	approx. m	1.00 x 0.55 x 0.20	1.20 x 0.55 x 0.20	1.50 x 0.65 x 0.20	1.80 x 0.70 x 0.20
Weight	approx. kg	11.2	13.6	16.0	20.0
EAN code		4019502337800	4019502337817	4019502337824	4019502337831
Order no.		804212	804216	804220	804224


For an explanation of working height/reach height in accordance with BGI 694, see page 10.

Wooden freestanding deep rung ladder, double-sided 7-1490

5 year guarantee


- The indispensable trestle and painter's ladder for tradespeople.
- Stiles made of soft wood or hard wood, rungs made of stable beech.
- High-quality stile-rung connection with two-finger plug.
- The strong hinges ensure a secure standing position.
- Anti-spread safety device made of high-strength red straps.
- The conical ladder has a minimum width at the top of 370 mm.
- Ladder hook integrated into the hinge.
- Wide rungs on both sides for safe, pleasant working conditions.
- Two flat rungs at the top.
- EN 131/GS tested.
- Including tool bag.

Recommended accessories:



Ladder shoe

Order no. 007855
See also accessories on page 170.



Foot extension

Order no. 0079640
See also accessories on page 166.

More accessories can be found from page 162 onwards.




7-1490

You will find further step ladders on page 20, 21, 22, 33.



Tool bag



Stile fixing



Deep rung



Bucket hook



Safety locking bar

S

Number of rungs		2x4	2x5	2x6	2x7	2x8	2x10	2x12
Length	approx. m	1.24	1.52	1.80	2.08	2.36	2.92	3.48
Standing height	approx. m	0.80	1.10	1.35	1.65	1.90	2.45	3.00
Working height	approx. m	2.30	2.60	2.85	3.15	3.40	3.95	4.50
Reach height	approx. m	2.80	3.10	3.35	3.65	3.90	4.45	5.00
Vert. ht, stepladder	approx. m	1.18	1.45	1.70	2.00	2.25	2.75	3.30
Width between stiles	approx. m	490	520	550	580	610	670	730
Weight	approx. kg	7.0	9.0	11.0	13.0	15.0	19.0	23.0
EAN code		4019502340862	4019502340879	4019502340886	4019502340893	4019502340909	4019502340916	4019502340923
Order no.		7149008	7149010	7149012	7149014	7149016	7149020	7149024

For an explanation of working height/reach height in accordance with BGI 694, see page 10.